



CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS

ASSEMBLY INSTRUCTION MODEL# CAP-8513-MK-TG



Crystorama.com

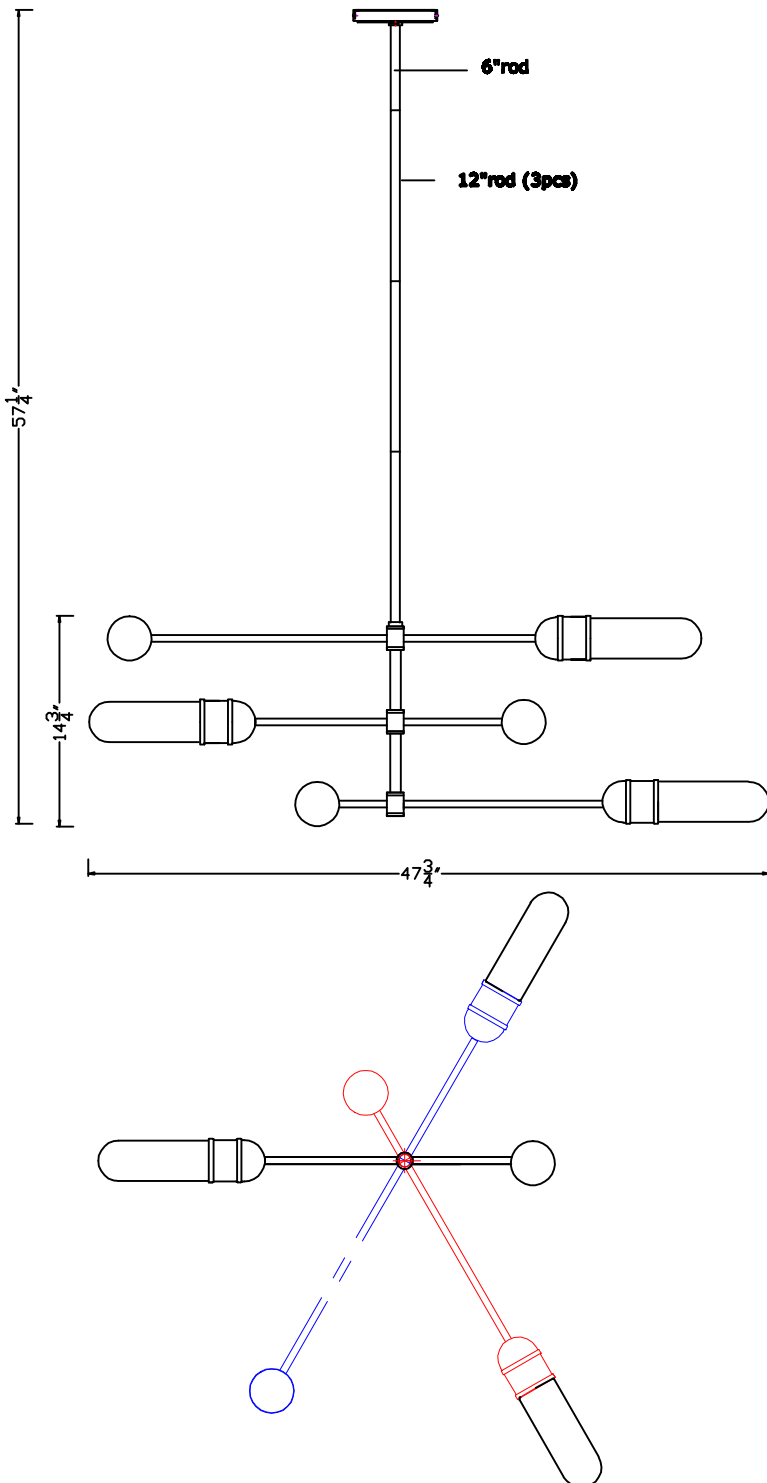

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



TYPE T10

Included 3 - Med T10 LED Bulb
6 Watts Recommended
Use LED Bulbs for Extended Use
The Fixture is Damp Rated

How to install

1. Determine the desired hanging height and choose the correct length of rods.
2. Feed fixture wires through the rod and canopy. Connect the rods together and then screw the canopy onto the top of the rods.
3. Place the mounting plate over the outlet box and mark points at the center of the hole on the mounting plate.
4. Drill the holes at marked points and insert the plastic anchors. place the mounting plate over the outlet box and secure with the anchor screws.
5. Install canopy onto the mounting plate, and secure with the screws.
6. Install the bulb into the socket (bulb included).
7. Screw the glass clockwise into the metal band, locking it in place.
8. Install each ball at the opposite end of the arm by screwing clockwise.

Caution:

This chandelier has three tiers. The middle tier is fixed and cannot be rotated. The top and bottom tiers can be rotated clockwise 70 degrees or less. To prevent the downrod becoming loose and the fixture hanging crooked. DO NOT rotate the arms counterclockwise.

WARNING: This product can expose you to Lead which is known to the state of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P85Warnings.ca.gov

CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS

ASSEMBLY INSTRUCTION MODEL# CAP-8513-MK-TG



Crystorama.com

Part Number

- A. (1)-Mounting Hardware ;
- B. (1)-Mounting plate;
- C. (1)-Canopy ; W6"XH0.6"(XNO8513MKCAN6IN)
- D. (3)-Screw;8/32"X10MM
- E. (1)- Rod ; W 0.63"XH6"(XNO8513MKROD6IN)
- F. (3)- Rod ; W 0.63"XH12"(XNO8513MKROD12IN)
- G. Metal Band;
- H. (3)-Bulb;T10X185mm,LED6W
- I. (3)-Glass ;W2.8"XH8.7" (XNO8511GLA8.75IN)
- J. (3)-Ball ;W3" (XNO8513BALL3IN)

